


REC Temovex RT-400S-EC-RS

VENTILATION CONTROL:

Central needs control

Control factor: 0,85

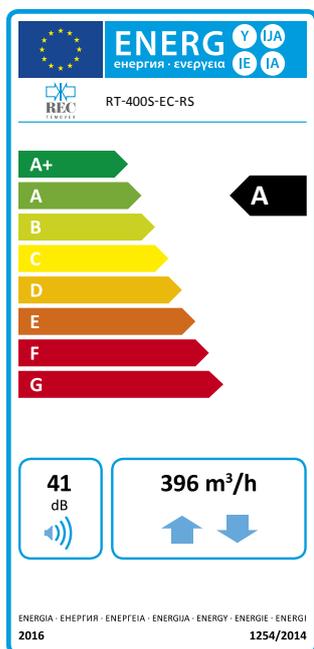

| A | Suppliers name | REC Temovex | | |
|---|--------------------------------|--|-----------------------------|--------------|
| B | Suppliers model identifier | RT-400S-EC-RS | | |
| C | Specific energy consumption | Climat zone | SEC | Energy class |
| | | Cold | -71,1 kWh/m ² år | A+ |
| | | Average | -35,5 kWh/m ² år | A |
| | | Warm | -12,6 kWh/m ² år | E |
| D | Declared typology | Bidirectional | | |
| E | Type of drive | Variable speed drive | | |
| F | Type of heat recovery system | Recuperativ (Counter-flow) | | |
| G | Thermal efficiency | 76% | | |
| H | Maximum flow rate | 396 m ³ /h | | |
| I | Electrical power input | 238 W | | |
| J | Sound power level | 41 dB | | |
| K | Reference flow rate | 0,077 m ³ /s | | |
| L | Reference pressure difference | 50 Pa | | |
| M | SPI | 0,30 W/(m ³ /h) | | |
| N | Control factor | Central needs control | | |
| O | Maximum leakage | Internal 1,4% | | |
| | | External 2,3% | | |
| P | Mixing rate | N/A | | |
| Q | Visual filter warning | Red LED on hand control | | |
| R | Grill installing instructions | N/A | | |
| S | Disassembly instructions | www.rec-indovent.se | | |
| T | Airflow sensitivity | N/A | | |
| U | Air tightness | N/A | | |
| V | Annual electricity consumption | Climat zone | Consumption | |
| | | Cold | 854 kWh/a | |
| | | Average | 317 kWh/a | |
| | | Warm | 272 kWh/a | |
| W | Annual heating saved | Climat zone | Besparing | |
| | | Cold | 8368 kWh/a | |
| | | Average | 4278 kWh/a | |
| | | Warmt | 1934 kWh/a | |

Product information according to Commission Regulation (EU) no. 1253/2014 och 1254/2014



REC INDOVENT AB

Box 37, SE-431 21 Mölndal, Sweden

Besöksadress: Kärragatan 2 • Tel: +46 31 67 55 00 • Fax: +46 31 87 58 45

www.rec-indovent.se

INDOVENT


Experter på inneklimat i lågenergihus

REC Temovex RT-400S-EC-RS

VENTILATION CONTROL:

Local needs control

Control factor: 0,65

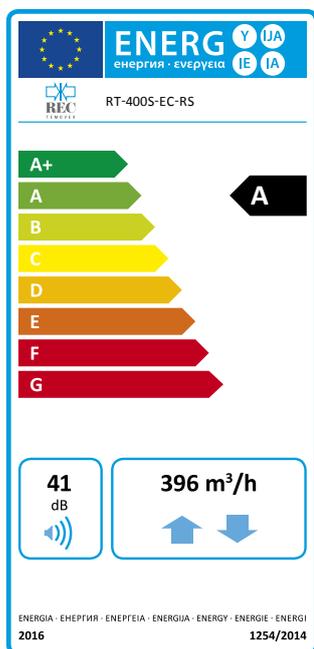

| A | Suppliers name | REC Temovex | | |
|---|--------------------------------|--|---------------|--------------|
| B | Suppliers model identifier | RT-400S-EC-RS | | |
| C | Specific energy consumption | Climat zone | SEC | Energy class |
| | | Cold | -76,8 kWh/m2a | A+ |
| | | Average | -39,8 kWh/m2a | A |
| | | Warm | -16,0 kWh/m2a | E |
| D | Declared typology | Bidirectional | | |
| E | Type of drive | Variable speed drive | | |
| F | Type of heat recovery system | Recuperativ (Counter-flow) | | |
| G | Thermal efficiency | 76% | | |
| H | Maximum flow rate | 396 m3/h | | |
| I | Electrical power input | 238 W | | |
| J | Sound power level | 41 dB | | |
| K | Reference flow rate | 0,077 m3/s | | |
| L | Reference pressure difference | 50 Pa | | |
| M | SPI | 0,30 W/(m3/h) | | |
| N | Control factor | Local needs control | | |
| O | Maximum leakage | Internal 1,4% | | |
| | | External 2,3% | | |
| P | Mixing rate | N/A | | |
| Q | Visual filter warning | Red LED on hand control | | |
| R | Grill installing instructions | N/A | | |
| S | Disassembly instructions | www.rec-indovent.se | | |
| T | Airflow sensitivity | N/A | | |
| U | Air tightness | N/A | | |
| V | Annual electricity consumption | Climat zone | Consumption | |
| | | Cold | 741 kWh/a | |
| | | Average | 204 kWh/a | |
| | | Warm | 159 kWh/a | |
| W | Annual heating saved | Climate zone | Heating saved | |
| | | Cold | 8655 kWh/a | |
| | | Average | 4424 kWh/a | |
| | | Warm | 2001 kWh/a | |

Product information according to Commission Regulation (EU) no. 1253/2014 och 1254/2014



REC INDOVENT AB

Box 37, SE-431 21 Mölndal, Sweden

Besöksadress: Kärragatan 2 • Tel: +46 31 67 55 00 • Fax: +46 31 87 58 45

www.rec-indovent.se

INDOVENT

Experter på inneklimat i lågenergihus