

Supply/exhaust air valve for ceiling

Supply/exhaust air valve for ceiling TLKL



Uses

The supply/exhaust air valve TLKL is designed to be installed in the ceiling in houses, hotels and offices. TLKL is suitable for ventilation systems with low pressure drops.

Design

The air valve has a modern design, aimed to fit into most interiors. The low structural height of only 10 mm makes it an invisible part of the interior. TLKL is made of sheet steel. High-quality surface treatment in white epoxy color (RAL 9016, gloss 30%), which gives a matte and dirt rejecting surface.

Regulation of air flow

Adding air flow damper TLRS to the air valve allows to adjust the air flow rate. It gives accurate adjustment.

Installation

Fixed with 4 screws d3.


Accessories

Air flow damper TLRS

TLRS 100 - 52 g.

TLRS 125 - 68 g.

Dimensions and weight

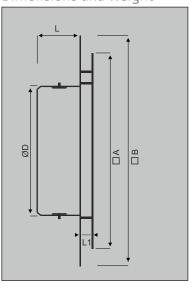

ØD (mm)	□ A (mm)	□B (mm)	L (mm)	L1 (mm)	Weight (g)
100	167	196	36	10	420
125	167	196	36	10	445




Supply/exhaust air valve for ceiling



Selection diagram

TLKL-100 supply/exhaust

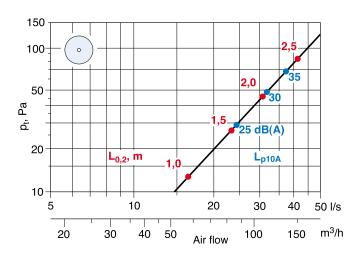

TLKL-125 supply/exhaust

